

HELICOPTER WASH PAD



**SURFACE MOUNTED!
EASY TO RELOCATE!
STEEL CONSTRUCTION!**


PRODUCT SPECIFICATIONS:

The Tri-Star Wash Pad provides a heavy duty, drive on wash deck which is surface mounted and can be relocated as needed. Dim: Wash Pad – 56'L x 19'W, Wash Deck 6"H slopes to 1/4"H, comprised of seven panels. Ramp – 14'W x 10'L, comprised of two interlocking panels.

The system is designed to flow wash water to the closed end of the system where it can be recovered from a 6' long x 19' wide collection area. Wash water can be recovered through side wall drain ports, or vacuumed off the floor of the collection area. The system is surrounded on three sides by an 8" high steel side walls, painted safety yellow to avoid tripping.

MATERIALS:

Constructed of steel plate the entire surface is supported on a spider web of steel gussets to provide maximum support for the aircraft and support vehicle. Each panel is encapsulated in a thick fiberglass coating bonded to the steel surface for maximum protection against fuels, industrial cleaners, weather, and rough handling.

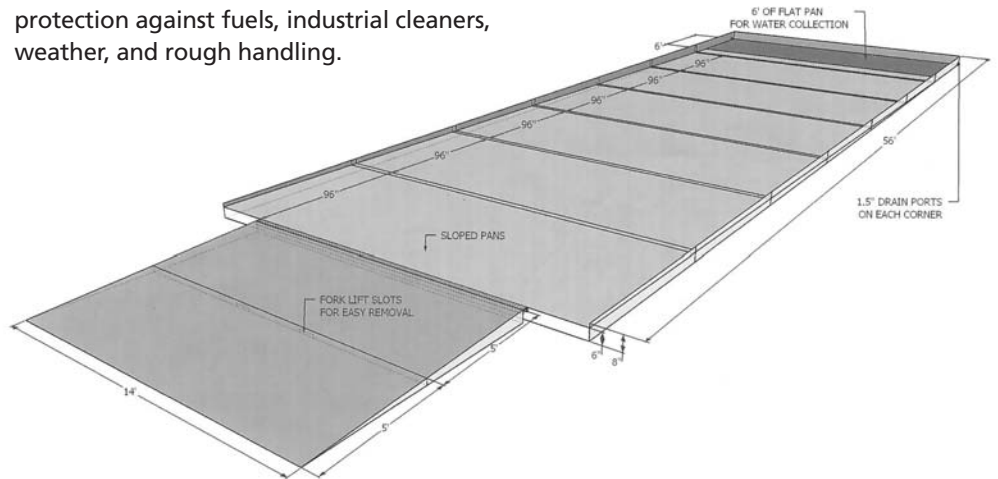



WASH PAD: 56 FT. LONG X 19 FT. WIDE X 6 IN. HIGH
RAMP: 14 FT. WIDE X 10 FT. LONG.

HELICOPTER WASH PAD

- Low profile for easy access
- Modular Design
- Sloped Wash Deck
- Surface Mounted
- Relocatable
- Steel Construction
- Rugged Fiberglass Protective Coating


OPTIONS AVAILABLE:

- Wash Pads available in a variety of lengths, widths, and heights to meet your requirement.
- Add Overspray Panels to one side, or all sides. Removable panel design. 4 ft. and 6 ft. options.
- Include raised / grated collection sumps as desired.
- Add railing or chain fencing as desired.
- We specialize in custom applications ... lets discuss your unique needs!



STRUCTURE:

Designed for heavy loads, the under carriage of the wash pad and ramp is honey combed with steel gussets designed to support heavy loads.

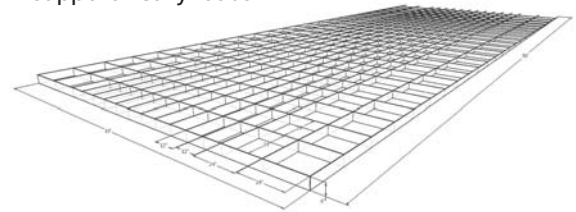

MODULAR DESIGN:

The Pad is formed from seven panels (six seams). The seams feature a two inch over-lapping joint, with a gasket and caulking compressed between the two flanges. The slope of the deck assists in flowing wash water down slope, away from the seams.



RAMP:

The 14 ft. Wide by 10 ft. Long Ramp is designed to index into the entry end of the Wash Pad, and is constructed in two sections that index together to make it easy to handle with a forklift.

